



MASTER TL-D Super 80



MASTER TL-D Super 80 58W/840 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Life to 10% failures (nom.)	12000 h
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %
	Sphere
Light Technical	
Colour Code	840 [CCT of 4,000 K]
Lamp Luminous Flux 25°C EL (Nom)	5240 lm
Lamp Luminous Flux (Nom)	5240 lm
Colour Designation	Cool White (CW)

Chromaticity coordinate X (nom.)	0.38
Chromaticity coordinate Y (nom.)	0.38
Colour Temperature, horizontal (Nom)	4000 K
Lamp Luminous Efficacy EM (Nom)	90 lm/W
Colour Rendering Index,horiz (Nom)	80
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical

Power (Rated) (Nom)	59.4 W
Lamp current (nom.)	0.670 A

MASTER TL-D Super 80

Temperature

Design temperature (nom.) 25 °C

Controls and Dimming

Dimmable Yes

Mechanical and Housing

Bulb shape T8 [26 mm (T8)]

Approval and Application

Energy Efficiency Class G

Mercury (Hg) content (max.) 2 mg


Mercury (Hg) content (nom.) 2.0 mg

Energy consumption kWh/1,000 hours 60 kWh
423398

Product Data

Full product code	871150063219740
Order product name	MASTER TL-D Super 80 58W/840 1SL/25
EAN/UPC – product	8711500632197
Order code	927922084023
Local order code	9279-220-84014
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	927922084023
SAP net weight (piece)	167.000 g
ILCOS code	FD-58/40/1B-E-G13


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 58W/840 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm

TL-D 58W/840

Photometric data

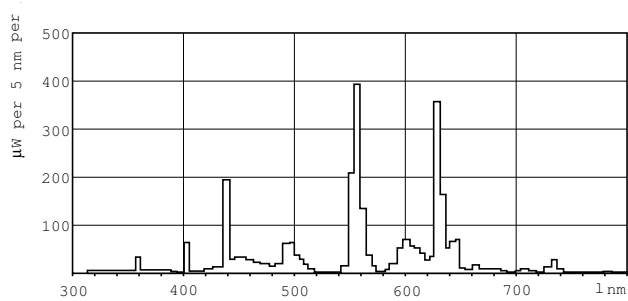

Lightcolour /840

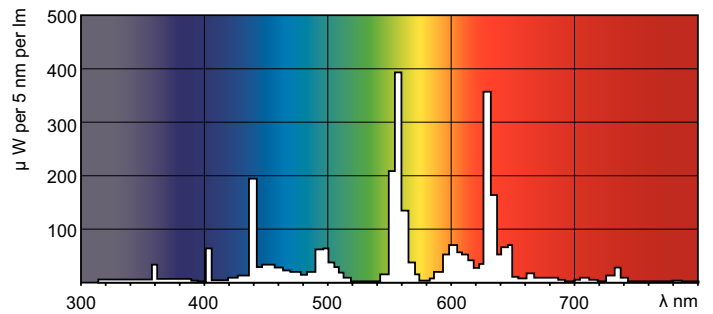

Lightcolour /840

MASTER TL-D Super 80

Lifetime



LDLE_TL-D8_0001-Life expectancy diagram

LDLE_TL-D8_0002-Life expectancy diagram



LDLM_TL-D8_0001-Lumen maintenance diagram

