



# MASTER Actinic BL TL-D

## MASTER Actinic BL TL-D 15W/10 1SL/25

The Philips MASTER Actinic BL TL-D(-K) family is an ideal choice for insect traps. These lamps have the perfect spectrum for attracting insects. Also, they have virtually no UV-B output, and so are perfectly safe. Furthermore, they have the special "MASTER" coating to improve the efficiency, initial UV-A output and maintenance of the lamp. What's more, with the lowest mercury content in the industry and being 100% lead-free, combined with their high efficiency, these lamps represent the best choice for the environment. Optionally, for extra safety you can apply a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	G13 [ Medium Bi-Pin Fluorescent]
Main application	Insect traps
Life to 50% failures (nom.)	13000 h
Useful life (nom.)	12000 h
Light Technical	
Colour Code	10
Colour Designation	Actinic


Chromaticity coordinate X (nom.)	225
Chromaticity coordinate Y (nom.)	215
UV Depreciation at 2,000 h	7 %
UV depreciation at 5000 hours	14 %
Depreciation at 500 Hours	18 %
Operating and Electrical	
Power (Rated) (Nom)	15.9 W
Lamp current (nom.)	0.335 A

# MASTER Actinic BL TL-D

Voltage (Nom)	55 V
<b>Mechanical and Housing</b>	
Bulb shape	T26 [ T 26mm]
<b>Approval and Application</b>	
Mercury (Hg) content (nom.)	3.0 mg
<b>UV</b>	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	4.0 W

<b>Product Data</b>	
Full product code	872790092696500
Order product name	MASTER Actinic BL TL-D 15W/10 1SL/25
EAN/UPC – product	8727900926965
Order code	928022601003
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	928022601003
SAP net weight (piece)	56.570 g



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER Actinic BL TL-D 15W/10 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

## MASTER Actinic BL TL-D 15W/10 1SL/25

## Photometric data

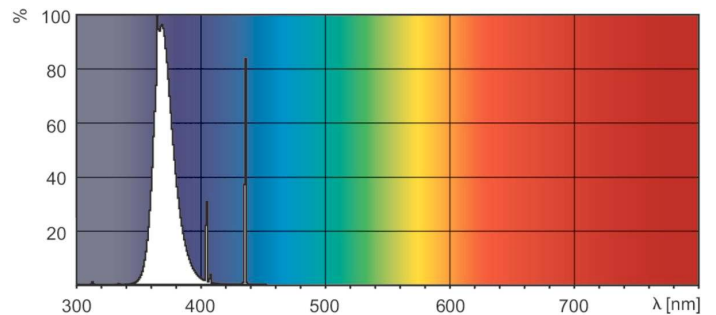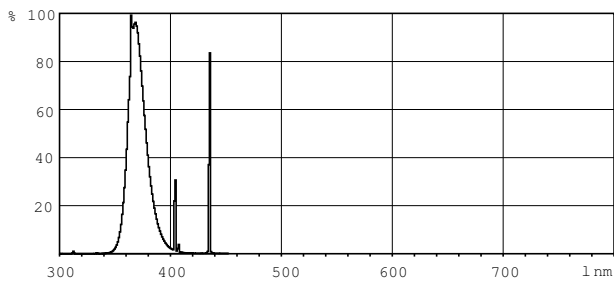

## Lightcolour /10

## Lightcolour /10

## MASTER Actinic BL TL-D

