



# UV-B Narrowband TL

## TL 100W/01 SLV/10

Tubular or compact single-ended low-pressure mercury vapour fluorescent lamps

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information	
Cap base	R17D [ R17d (RDC)]
Main application	-
Life to 50% failures (nom.)	1000 h
Useful life (nom.)	1000 h
Light Technical	
Colour Code	01
Colour Designation	Ultra Violet B
Chromaticity coordinate X (nom.)	216
Chromaticity coordinate Y (nom.)	208
Depreciation at 500 Hours	10 %
UV depreciation at 1,000 h	15 %
Operating and Electrical	
Power (Rated) (Nom)	100 W
Lamp current (nom.)	0.97 A
Voltage (Nom)	126 V
Mechanical and Housing	
Cap-base information	Adaptor

Bulb shape	T38 [ T 38mm]
Approval and Application	
Mercury (Hg) content (nom.)	14.0 mg
UV	
UV-B radiation 100 hours (IEC)	16.1 W
UV-B radiation 5 hours (IEC)	18.4 W
Product Data	
Full product code	871869666233500
Order product name	TL 100W/01 SLV/10
EAN/UPC – product	8718696662335
Order code	928034900130
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	928034900130
SAP net weight (piece)	0.470 kg

# UV-B Narrowband TL


## Dimensional drawing

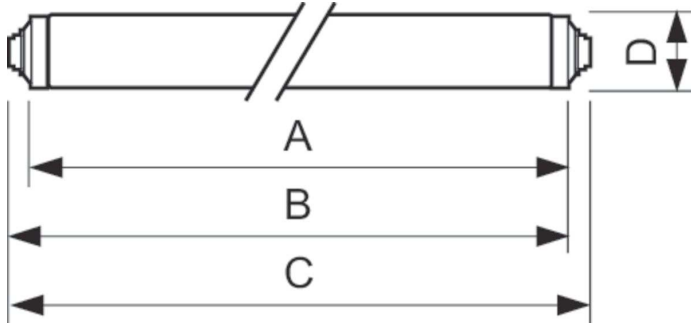


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 100W/01 SLV/10	40.5 mm	1763.8 mm	1770.9 mm	1768.5 mm	1782.2 mm

TL 100W/01 R17d

## Photometric data

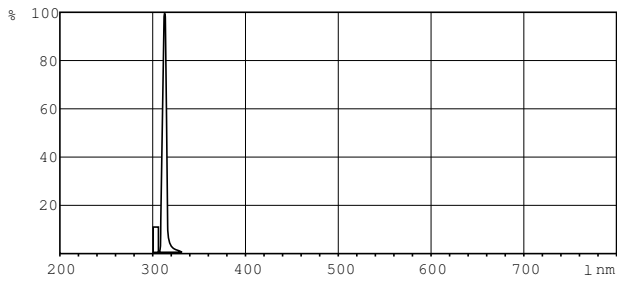

Lightcolour /01

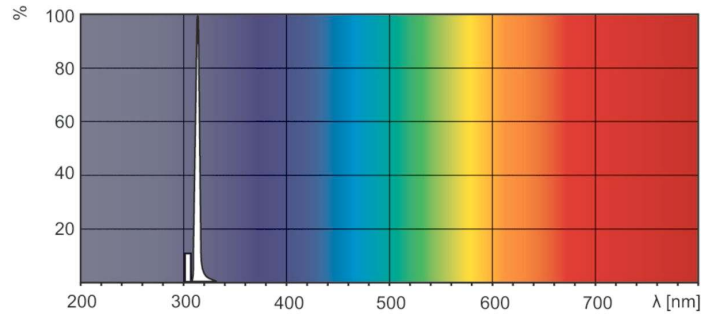

Lightcolour /01

