



# TL-D Colored

## TL-D Colored 36W Blue 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Voltage (Nom)	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	103 V	
Life to 10% failures (nom.)	12000 h	Temperature	
Life to 50% failures (nom.)	15000 h	Design temperature (nom.)	25 °C
Light Technical		Controls and Dimming	
Colour Code	180	Dimmable	Yes
Lamp Luminous Flux 25°C EL (Nom)	960 lm	Mechanical and Housing	
Lamp Luminous Flux (Nom)	960 lm	Bulb shape	T8 [ 26 mm (T8)]
Colour Designation	Blue (B)	Approval and Application	
LLMF 2000 h Rated	85 %	Mercury (Hg) content (nom.)	13.0 mg
Operating and Electrical		Energy consumption kWh/1,000 hours	45 kWh
Power (Rated) (Nom)	36.0 W		
Lamp current (nom.)	0.440 A		


## TL-D Colored

### Product Data

Full product code	871150072754140
Order product name	TL-D Colored 36W Blue 1SL/25
EAN/UPC – product	8711500727541
Order code	928048501805
Local order code	9280-485-01805

SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	928048501805
SAP net weight (piece)	135.000 g


### Dimensional drawing

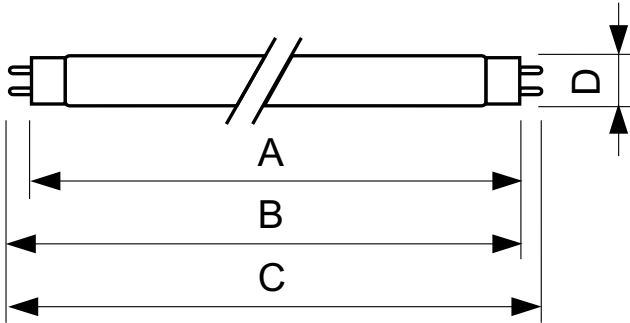

TL-D 36W/180 Blue

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 36W Blue 1SL/25	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

### Photometric data

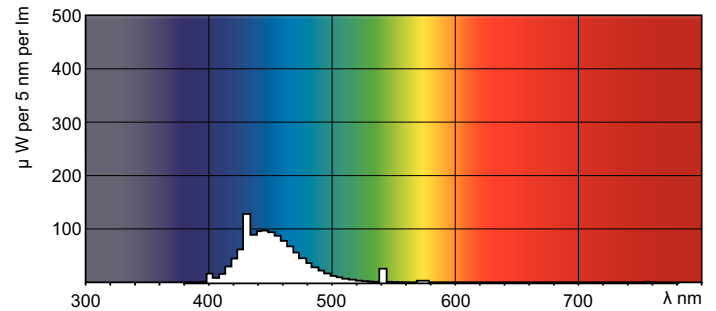

LDPB\_TL-DCOL\_180-Spectral power distribution B/W

Lightcolour TL-D /180

