



MASTER TL-D Food

MASTER TL-D Food 36W/79 SLV/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h
Light Technical	
Colour Code	79
Lamp Luminous Flux 25°C EL (Nom)	1750 lm
Colour Designation	Food
Lumen maintenance 2,000 hours (nom.)	90 %
Lumen maintenance 5,000 hours (nom.)	85 %
Colour Temperature, horizontal (Nom)	3800 K
Lamp Luminous Efficacy EM (Nom)	49 lm/W
Colour Rendering Index,horiz (Nom)	74
Operating and Electrical	
Power (Rated) (Nom)	36.0 W
Lamp current (nom.)	0.440 A
Voltage (Nom)	103 V

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb shape	T8 [26 mm (T8)]
Approval and Application	
Mercury (Hg) content (nom.)	5.0 mg
Energy consumption kWh/1,000 hours	43 kWh
Product Data	
Full product code	871150070622540
Order product name	MASTER TL-D Food 36W/79 SLV/25
EAN/UPC – product	8711500706225
Order code	928048502043
Local order code	9280-485-02043
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	928048502043
SAP net weight (piece)	135.000 g
ILCOS code	FD-36/38/2A-E-G13

MASTER TL-D Food



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Food 36W/79 SLV/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TL-D Food 36W/79



Photometric data

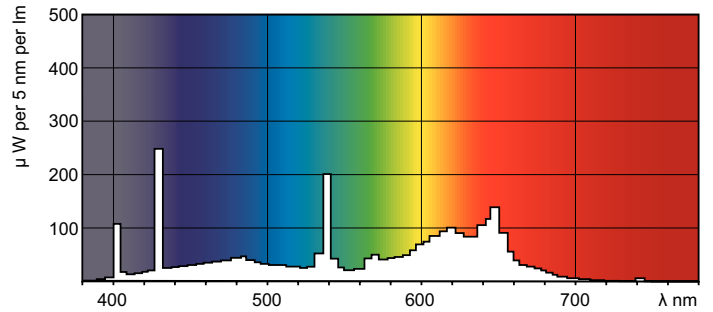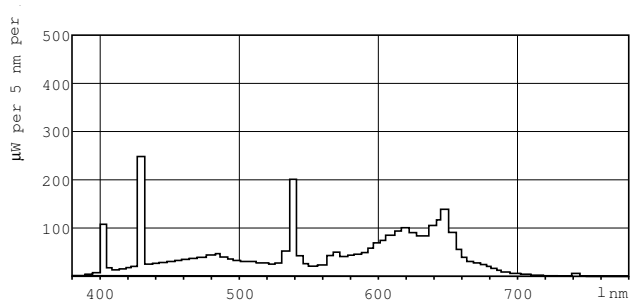

Lightcolour /79

Lightcolour /79

Lifetime

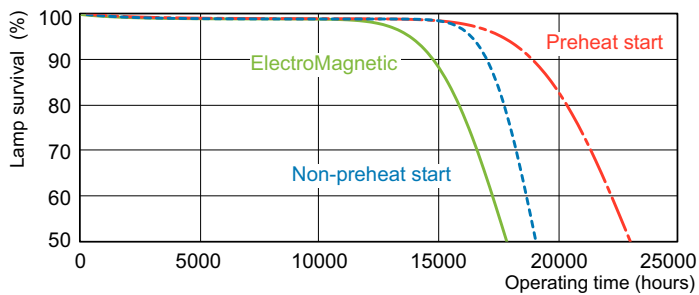


LDLE_TL-DFOOD_0002-Life expectancy diagram

LDLE_TL-DFOOD_0001-Life expectancy diagram

MASTER TL-D Food

Lifetime

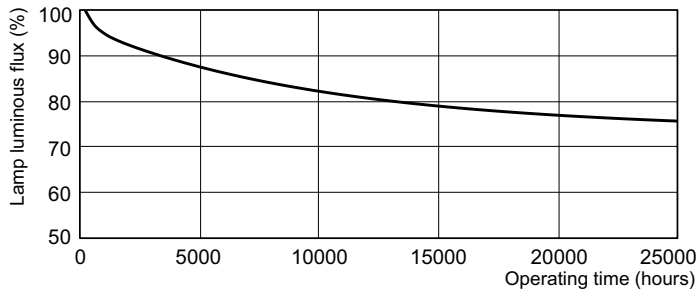

LDLM_TL-DFOOD_0001-Lumen maintenance diagram

