



TL-D Standard Colours

TL-D 36W/54-765 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Controls and Dimming	
Cap base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	Yes
Life to 10% failures (nom.)	10000 h		
Life to 50% failures (nom.)	13000 h		
Light Technical		Approval and Application	
Colour Code	54-765	Energy efficiency label (EEL)	A
Lamp Luminous Flux 25°C EL (Nom)	2500 lm	Mercury (Hg) content (nom.)	8.0 mg
Colour Designation	Cool Daylight	Energy consumption kWh/1,000 hours	43 kWh
Lumen maintenance 2,000 hours (nom.)	90 %		
Lumen maintenance 5,000 hours (nom.)	83 %		
Colour Temperature, horizontal (Nom)	6200 K		
Colour Rendering Index,horiz (Nom)	75		
Operating and Electrical		Product Data	
Power (Rated) (Nom)	36.0 W	Full product code	871150095047540
Lamp current (nom.)	0.440 A	Order product name	TL-D 36W/54-765 1SL/25
Voltage (Nom)	103 V	EAN/UPC – product	8711500950475
		Order code	928048505422
		SAP numerator – quantity per pack	1
		Numerator – packs per outer box	25
		SAP material	928048505422
		SAP net weight (piece)	135.000 g
		ILCOS code	FD-36/62/2A-E-G13

TL-D Standard Colours


Dimensional drawing

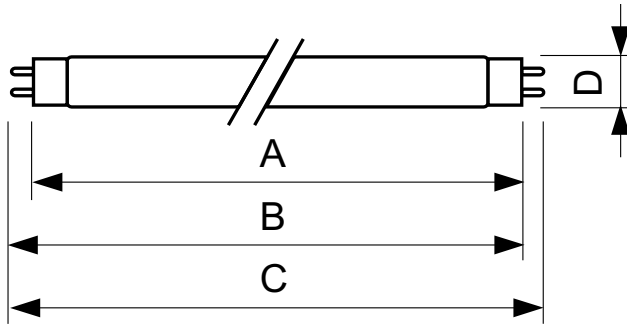


TL-D 36W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/54-765 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

Photometric data

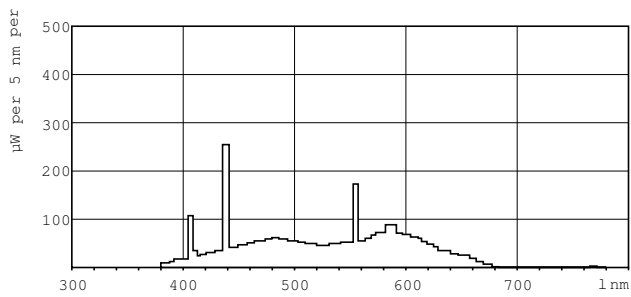


Lightcolour /54-765

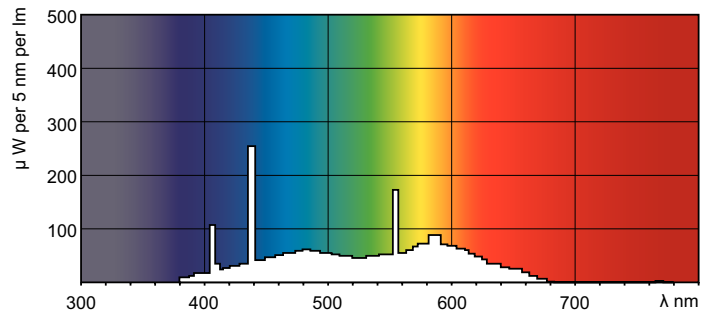


Lightcolour /54-765

Lifetime

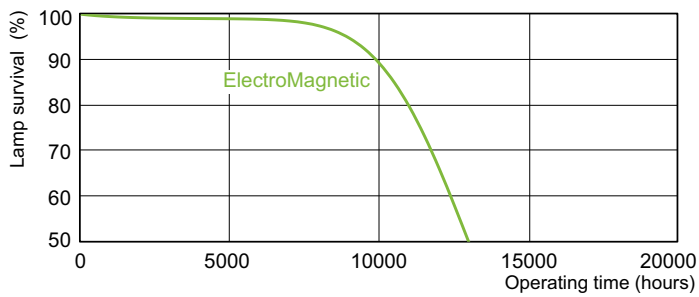

LDLE_TL-DSTD_0001-Life expectancy diagram

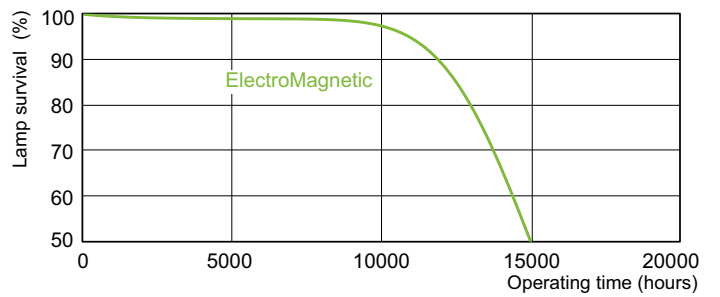

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime



LDLM_TL-DSTD_0001-Lumen maintenance diagram

