



# Essential Smartbright T5 Batten

## BN058C LED9/WW L900 GM

Polycarbonate

The BN058 Batten provides flexibility so customers can choose from three CCT and four different size and lumen packages, based on their specific needs.

### Product data

General Information		Optical cover/lens finish	
Lamp colour code	730 warm white	Optical cover/lens finish	Opal
Optical cover/lens type	Polycarbonate	Overall length	885 mm
Control interface	-	Overall width	21 mm
Protection class IEC	Safety class II (II)	Overall height	32.3 mm
CE mark	-	Colour	White
Number of products on MCB (16 A type B)	8	<b>Approval and Application</b>	
Light source engine type	LED	Ingress protection code	IP20 [ Finger-protected]
<b>Operating and Electrical</b>		Mech. impact protection code	IK02 [ 0.2 J standard]
Input Voltage	220 to 240 V	<b>Initial Performance (IEC Compliant)</b>	
Input frequency	50 or 60 Hz	Initial luminous flux (system flux)	900 lm
Power factor (min.)	0.5	Luminous flux tolerance	+/-10%
<b>Controls and Dimming</b>		Initial LED luminaire efficacy	85 lm/W
Dimmable	No	Lamp colour temperature	3000 K
<b>Mechanical and Housing</b>		Colour Rendering Index	>70
Housing material	Polycarbonate	Initial input power	9.6 W
Optical cover/lens material	Polycarbonate	Power consumption tolerance	+/-10%

# Essential Smartbright T5 Batten

## Application Conditions

Ambient temperature range -20 to +40 °C


## Product Data

Full product code 871016331397999  
Order product name BN058C LED9/WW L900 GM  
EAN/UPC – product 8710163313979  
Order code 911401709552

SAP numerator – quantity per pack	1
Numerator – packs per outer box	24
SAP material	911401709552
SAP net weight (piece)	0.110 kg



## Dimensional drawing

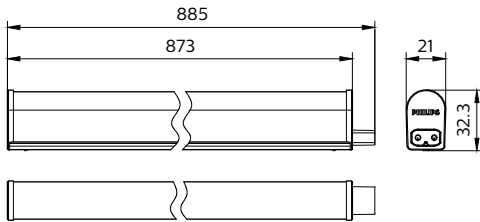

Batten LED

