



# Essential Smartbright T5 Batten

## BN058C LED5/NW L600 GM

Polycarbonate

The BN058 Batten provides flexibility so customers can choose from three CCT and four different size and lumen packages, based on their specific needs.

### Product data

General Information	
Lamp colour code	740 neutral white
Optical cover/lens type	Polycarbonate
Control interface	-
Protection class IEC	Safety class II (II)
CE mark	-
Number of products on MCB (16 A type B)	8
Light source engine type	LED

Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.5

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Housing material	Polycarbonate
Optical cover/lens material	Polycarbonate

Optical cover/lens finish	Opal
Overall length	585 mm
Overall width	21 mm
Overall height	32.3 mm
Colour	White

Approval and Application	
Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	600 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	85 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>70
Initial input power	6.5 W
Power consumption tolerance	+/-10%

# Essential Smartbright T5 Batten

## Application Conditions

Ambient temperature range -20 to +40 °C


## Product Data

Full product code 871016331401399  
Order product name BN058C LED5/NW L600 GM  
EAN/UPC – product 8710163314013  
Order code 911401709592

SAP numerator – quantity per pack	1
Numerator – packs per outer box	24
SAP material	911401709592
SAP net weight (piece)	0.080 kg



## Dimensional drawing

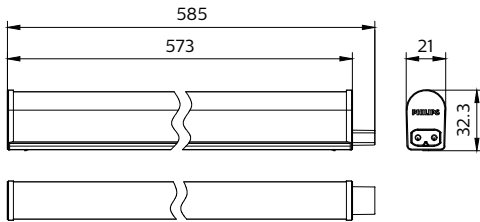

Batten LED

