



# Essential Smartbright T5 Batten

## BN058C LED3/WW L300 GM

Polycarbonate

The BN058 Batten provides flexibility so customers can choose from three CCT and four different size and lumen packages, based on their specific needs.

### Product data

General Information		Approval and Application	
Lamp colour code	730 warm white	Ingress protection code	IP20 [ Finger-protected]
Optical cover/lens type	Polycarbonate	Mech. impact protection code	IK02 [ 0.2 J standard]
Control interface	-	Initial Performance (IEC Compliant)	
Protection class IEC	Safety class II (II)	Initial luminous flux (system flux)	300 lm
CE mark	-	Luminous flux tolerance	+/-10%
Number of products on MCB (16 A type B)	8	Initial LED luminaire efficacy	85 lm/W
Light source engine type	LED	Lamp colour temperature	3000 K
Operating and Electrical		Colour Rendering Index	>70
Input Voltage	220 to 240 V	Initial input power	3.4 W
Input frequency	50 or 60 Hz	Power consumption tolerance	+/-10%
Power factor (min.)	0.45		
Controls and Dimming			
Dimmable	No		
Mechanical and Housing			
Housing material	Polycarbonate		
Optical cover/lens material	Polycarbonate		
Optical cover/lens finish	Opal		
Overall length	325 mm		
Overall width	21 mm		
Overall height	32.3 mm		
Colour	White		

# Essential Smartbright T5 Batten

## Application Conditions

Ambient temperature range -20 to +40 °C


## Product Data

Full product code 871016331403799  
Order product name BN058C LED3/WW L300 GM  
EAN/UPC – product 8710163314037  
Order code 911401709612

SAP numerator – quantity per pack 1  
Numerator – packs per outer box 24  
SAP material 911401709612  
SAP net weight (piece) 0.050 kg



## Dimensional drawing

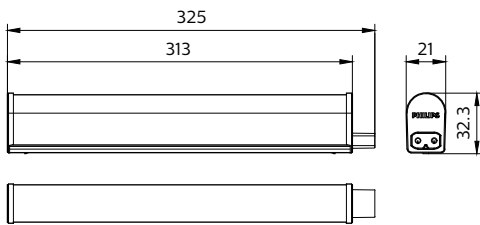

Batten LED

