



Essential Smartbright T5 Batten

BN058C LED3/CW L300 GM

Polycarbonate

The BN058 Batten provides flexibility so customers can choose from three CCT and four different size and lumen packages, based on their specific needs.

Product data

General Information		Approval and Application	
Lamp colour code	765 cool daylight	Ingress protection code	IP20 [Finger-protected]
Optical cover/lens type	Polycarbonate	Mech. impact protection code	IK02 [0.2 J standard]
Control interface	-	Initial Performance (IEC Compliant)	
Protection class IEC	Safety class II (II)	Initial luminous flux (system flux)	300 lm
CE mark	-	Luminous flux tolerance	+/-10%
Number of products on MCB (16 A type B)	8	Initial LED luminaire efficacy	85 lm/W
Light source engine type	LED	Lamp colour temperature	6500 K
Operating and Electrical		Colour Rendering Index	>70
Input Voltage	220 to 240 V	Initial input power	3.4 W
Input frequency	50 or 60 Hz	Power consumption tolerance	+/-10%
Power factor (min.)	0.45		
Controls and Dimming			
Dimmable	No		
Mechanical and Housing			
Housing material	Polycarbonate		
Optical cover/lens material	Polycarbonate		
Optical cover/lens finish	Opal		
Overall length	325 mm		
Overall width	21 mm		
Overall height	32.3 mm		
Colour	White		

Essential Smartbright T5 Batten

Application Conditions

Ambient temperature range -20 to +40 °C


Product Data

Full product code 871016331405199
Order product name BN058C LED3/CW L300 GM
EAN/UPC – product 8710163314051
Order code 911401709632

SAP numerator – quantity per pack 1
Numerator – packs per outer box 24
SAP material 911401709632
SAP net weight (piece) 0.050 kg



Dimensional drawing

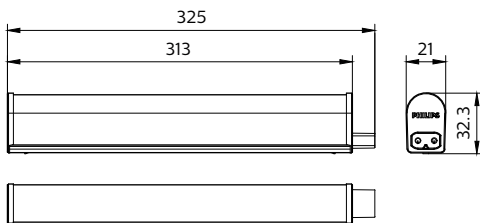

Batten LED

