



# MASTER LEDspot MV Value

## MASTER LEDspot VLE D 5-50W GU10 840 36D 1PF

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

### Product data

| General Information     |              |
|-------------------------|--------------|
| Cap base                | GU10 [ GU10] |
| EU RoHS compliant       | Yes          |
| Nominal lifetime (nom.) | 25000 h      |

| Switching cycle            | 50,000X               |
|----------------------------|-----------------------|
| Light Technical            |                       |
| Colour Code                | 840 [ CCT of 4,000 K] |
| Technical Beam Angle (Nom) | 36 °                  |

# MASTER LEDspot MV Value

|  |                 |
|--|-----------------|
| Lamp Luminous Flux 25°C EL (Nom)       | 450 lm          |
| Luminous intensity (nom.)              | 750 cd          |
| Colour Designation                     | Cool White (CW) |
| Colour Temperature, horizontal (Nom)   | 4000 K          |
| Lamp Luminous Efficacy EM (Nom)        | 90.00 lm/W      |
| Colour consistency                     | <6              |
| Colour Rendering Index,horiz (Nom)     | 80              |
| LLMF at end of nominal lifetime (nom.) | 70 %            |

## Operating and Electrical

|                                  |             |
|----------------------------------|-------------|
| Input frequency                  | 50 to 60 Hz |
| Power (Rated) (Nom)              | 5 W         |
| Lamp current (nom.)              | 25 mA       |
| Wattage equivalent               | 50 W        |
| Starting time (nom.)             | 0.5 s       |
| Warm-up time to 60% light (nom.) | 0.5 s       |
| Power factor (nom.)              | 0.7         |
| Voltage (Nom)                    | 220-240 V   |

## Temperature

|                       |       |
|-----------------------|-------|
| T-Case maximum (nom.) | 85 °C |
|-----------------------|-------|

## Controls and Dimming

|          |                            |
|----------|----------------------------|
| Dimmable | Only with specific dimmers |
|----------|----------------------------|

## Mechanical and Housing

|            |                     |
|------------|---------------------|
| Bulb shape | PAR16 [ PAR 2 inch] |
|------------|---------------------|


## Approval and Application

|                              |     |
|------------------------------|-----|
| Suitable for accent lighting | Yes |
|------------------------------|-----|

## Product Data

|                                   |   |
|-----------------------------------|---|
| Full product code                 | 871869975313900                             |
| Order product name                | MASTER LEDspot VLE D 5-50W GU10 840 36D 1PF |
| EAN/UPC – product                 | 8718699753139                               |
| Order code                        | 929002351102                                |
| SAP numerator – quantity per pack | 1   |
| Numerator – packs per outer box   | 10  |
| SAP material                      | 929002351102                                |
| SAP net weight (piece)            | 0.048 kg                                    |

## Dimensional drawing





GU10 220-240V 5-50W 375lm 36D 4000K D

| Product                                     | D     | C     |
|---|-------|-------|
| MASTER LEDspot VLE D 5-50W GU10 840 36D 1PF | 50 mm | 54 mm |


# MASTER LEDspot MV Value

## Photometric data




LEDspots GM 5W PAR16 GU10 840 36D-LDD

LEDspots GM 5W PAR16 GU10 840 36D-ADL

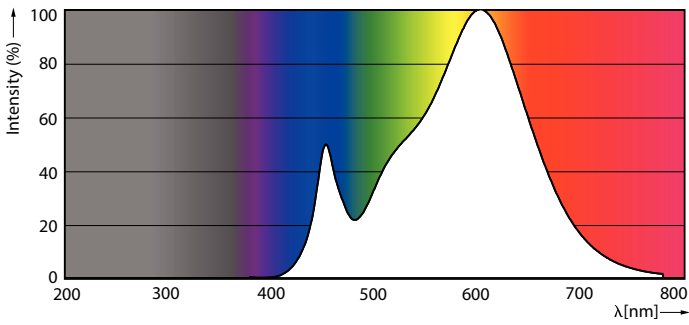


LEDspots GM 5W PAR16 GU10 840 36D-POC

## Lifetime

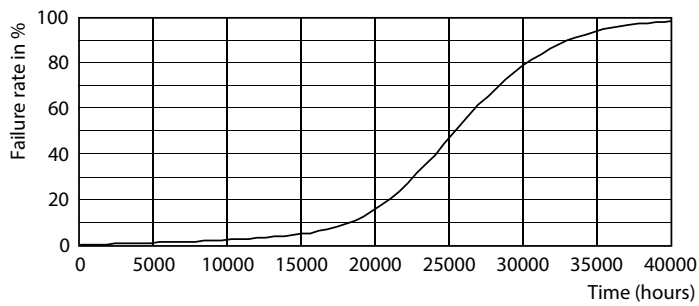

LEDspots LED 25K

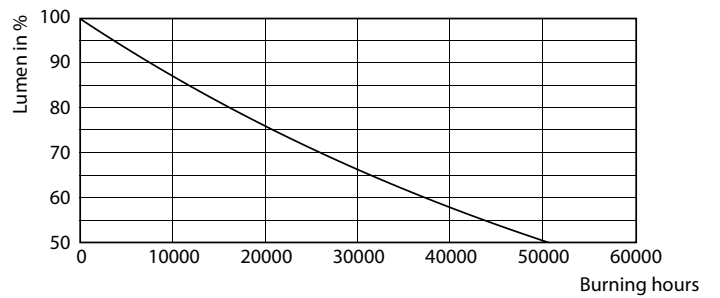

LEDspots LMP 25K

## MASTER LEDspot MV Value

