



MASTER LEDtube Mains T5



MASTER LEDtube 1500mm HE 20W 865 T5

The new Philips Master LEDtube Mains T5 brings simplicity to your lighting project. You don't need to pay attention to the driver technology anymore. Thanks to a unique design, Philips MASTER LEDtube Mains T5 installs in luminaires operating on mains power connection. So simple to operate! Perfectly safe, reliable & easy to install, the Philips MASTER LEDtube Mains T5 is the ideal alternative to standard fluorescent tubes to maximise value over lifetime with high energy savings and lower maintenance costs.

Product data

General Information	
Cap base	G5 [G5]
EU RoHS compliant	Yes
Nominal lifetime (nom.)	50000 h
Switching cycle	200,000X
Technical type	20-35W
	Sphere

Light Technical	
Colour Code	865 [CCT of 6,500 K]
Technical Beam Angle (Nom)	200 °
Lamp Luminous Flux 25°C EL (Nom)	3000 lm
Colour Designation	Cool Daylight
Colour Temperature, horizontal (Nom)	6500 K
Lamp Luminous Efficacy EM (Nom)	150.00 lm/W
Colour consistency	<6
Colour Rendering Index,horiz (Nom)	80

LLMF at end of nominal lifetime (nom.) 70 %	
---	--

Operating and Electrical	
Input frequency	50 to 60 Hz
Power (Rated) (Nom)	20 W
Lamp current (max.)	230 mA
Lamp current (min.)	85 mA
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.9
Voltage (Nom)	100-240 V


Temperature	
T-ambient (max.)	45 °C
T-ambient (min.)	-20 °C
T storage (max.)	65 °C
T storage (min.)	-40 °C

MASTER LEDtube Mains T5

T-Case maximum (nom.)	75 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Frosted
Bulb material	Glass
Product length	1500 mm
Bulb shape	Tube, double-ended
Approval and Application	
Energy Efficiency Class	D
Energy-saving product	Yes
Approval marks	RoHS compliance CE marking KEMA Keur certificate

Energy consumption kWh/1,000 hours	20 kWh 467356
Product Data	
Full product code	871869978359400
Order product name	MASTER LEDtube 1500mm HE 20W 865 T5
EAN/UPC – product	8718699783594
Order code	929002421408
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929002421408
SAP net weight (piece)	0.176 kg


Dimensional drawing

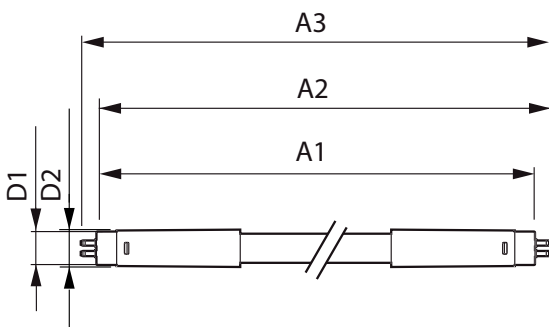


Master LEDtube 1500mm 20W865 G5 EU

Product	D1	D2	A1	A2	A3
MASTER LEDtube 1500mm HE 20W 865 T5	15.8 mm	19 mm	1449 mm	1454.9 mm	1463.2 mm

Photometric data

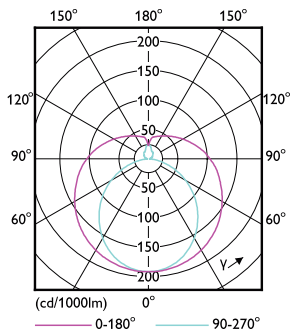


LEDtube MAS 8W G5 1000lm



LEDtube MAS 20W G5 3000lm 865

MASTER LEDtube Mains T5

Photometric data

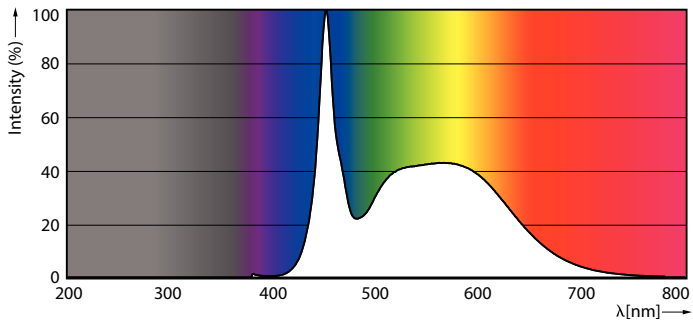


LEDtube MAS 16,5W G5 2500lm 865

Lifetime




LEDtube 50K-LED

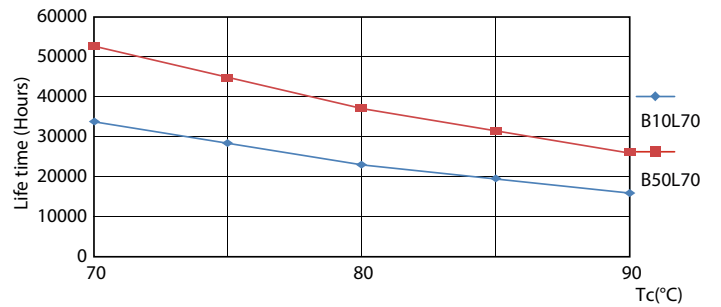

LEDtube MAS 1 26W 50K LifetimeVsTc-LED




LEDtube MAS 1 26W 50K FailureRate-LED

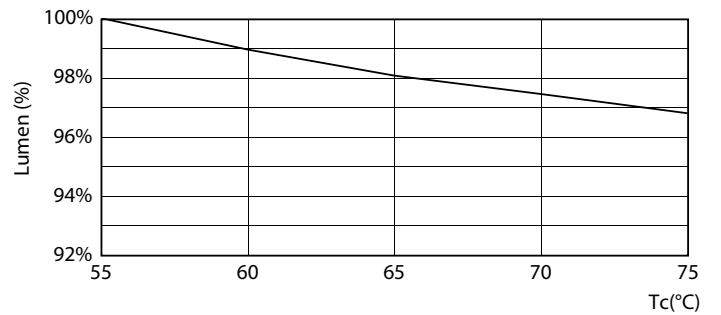

LEDtube MAS G3 20W 50K LumenVsTc-LMP

MASTER LEDtube Mains T5

Lifetime

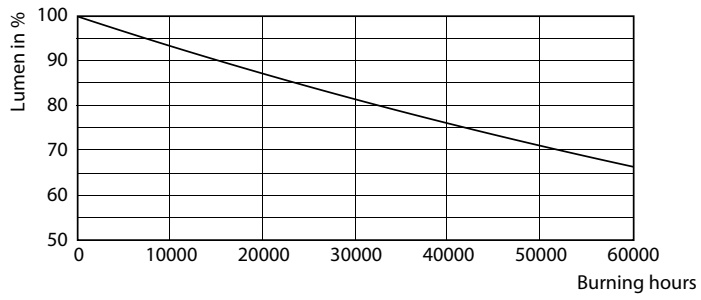

LEDtube 50K-LMP

