



CoreLine Recessed

RC134B LED37S/840 PSD W60L60 NOC

Coreline Recessed - 840 neutral white - Power supply unit with DALI interface

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Recessed range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information		Remarks	
Lamp colour code	840 neutral white	* - Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires – January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.	
Light source replaceable	No		
Number of gear units	1 unit		
Driver/power unit/transformer	PSD [Power supply unit with DALI interface]		
Driver included	Yes		
Optic type	WB [Wide beam]		
Luminaire light beam spread	93°		
Control interface	DALI		
Connection	PIP [Push-in connector and pull relief]		
Cable	-		
Protection class IEC	Safety class I (I)	Constant light output	No
Glow-wire test	850/30 [Temperature 850 °C, duration 30 s]	Number of products on MCB (16 A type B)	24
Flammability mark	F [For mounting on normally flammable surfaces]	EU RoHS compliant	Yes
CE mark	CE mark	Product family code	RC134B [Coreline Recessed]
ENEC mark	ENEC mark	Unified glare rating CEN	22
Warranty period	5 years	Operating and Electrical	
		Input Voltage	220 to 240 V
		Input frequency	50 to 60 Hz
		Inrush current	22 A

CoreLine Recessed

Inrush time	0.275 ms
Power factor (min.)	0.9

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Housing material	Steel
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Optical cover/lens finish	Textured
Overall length	597 mm
Overall width	597 mm
Overall height	41 mm
Colour	White
Dimensions (height x width x depth)	41 x 597 x 597 mm (1.6 x 23.5 x 23.5 in)

Approval and Application

Ingress protection code	IP44 [Wire-protected, splash-proof]
Mech. impact protection code	IK02 [0.2 J standard]

Initial Performance (IEC Compliant)

Initial luminous flux	3700 lm
Luminous flux tolerance	+/-8%
Initial LED luminaire efficacy	104 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	≥80

Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	35.5 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50,000 h	5 %
Lumen maintenance at median useful life* 50,000 h	L75

Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	1%
Suitable for random switching	Yes

Product Data

Full product code	871869934798700
Order product name	RC134B LED37S/840 PSD W60L60 NOC
EAN/UPC – product	8718699347987
Order code	34798700
Numerator – quantity per pack	1
SAP numerator – packs per outer box	1
Material no. (12 NC)	910925864756
SAP net weight (piece)	2.900 kg



Dimensional drawing

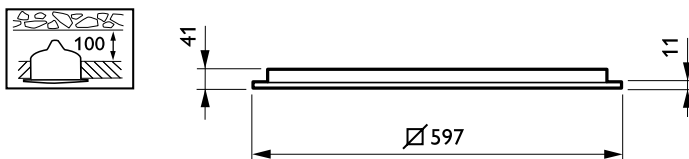

CoreLine Recessed RC134B/RC135B

CoreLine Recessed

