



# MASTER LEDspot MV Value

## MASTER LED spot VLE D 6.2-80W GU10 930 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot MV is a perfect fit for spot lighting (track, corridors, lift lobbies, display cases and cabinets) in the hospitality industry. It is particularly suitable to public areas where the light is on 24/7, such as lobbies, corridors, stairwells. MASTER LEDspot MV delivers huge energy savings and minimises maintenance cost without any compromise on brightness, enabling hospitality owners to achieve a return on their investment within one year. These LEDspots are compatible with most existing fixtures with a GU10 holder and designed as a retrofit replacement for halogen or incandescent spots. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere. For environments where the right atmosphere needs to be created (e.g. bars and restaurants), the “DimTone” feature could be useful. This is a LED feature that creates a warmer tone once light is dimmed down to lower intensities.

### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

### Product data

General Information		Technical type	
Cap base	GU10 [ GU10]		6.2-80W
EU RoHS compliant	Yes	Light Technical	
Nominal lifetime (nom.)	25000 h	Colour Code	930 [ CCT of 3,000 K]
Switching cycle	50,000X	Technical Beam Angle (Nom)	36 °
		Lamp Luminous Flux 25°C EL (Nom)	575 lm

## MASTER LEDspot MV Value

Luminous intensity (nom.)	850 cd
Colour Designation	White (WH)
Colour Temperature, horizontal (Nom)	3000 K
Lamp Luminous Efficacy EM (Nom)	92.00 lm/W
Colour consistency	<6
Colour Rendering Index,horiz (Nom)	90
LLMF at end of nominal lifetime (nom.)	70 %
Luminous flux in 90° cone (rated)	575 lm

### Operating and Electrical

Input frequency	50 to 60 Hz
Power (Rated) (Nom)	6.2 W
Lamp current (nom.)	33 mA
Wattage equivalent	80 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light (nom.)	0.5 s
Power factor (nom.)	0.88
Voltage (Nom)	220-240 V

### Temperature

T-Case maximum (nom.)	80 °C
-----------------------	-------

### Controls and Dimming

Dimmable	Yes
----------	-----


### Approval and Application

Energy efficiency label (EEL)	A++
Suitable for accent lighting	Yes
Energy consumption kWh/1,000 hours	7 kWh

### Product Data

Full product code	871869970525100
Order product name	MASTER LED spot VLE D 6.2-80W GU10 930 36D
EAN/UPC – product	8718699705251
Order code	929002068402
Numerator – quantity per pack	1
Numerator – packs per outer box	10
SAP material	929002068402
SAP net weight (piece)	0.038 kg

## Dimensional drawing





GU10 230V7.5W-80W650lm36D3000KDim15khrs

Product	D	C
MASTER LED spot VLE D 6.2-80W GU10 930 36D	50 mm	54 mm


# MASTER LEDspot MV Value

## Photometric data

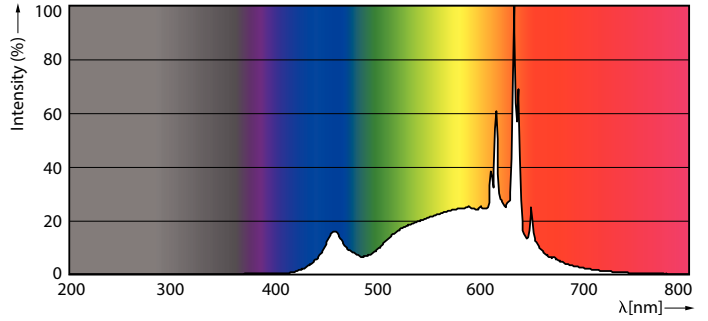


GU10 230V 7.5W-80W 650lm36D3000K Dim15khrs

GU10 230V 7.5W-80W 650lm36D3000K Dim15khrs




GU10 7.5-80W 650lm 2700K GU10 D 25khrs

## Lifetime

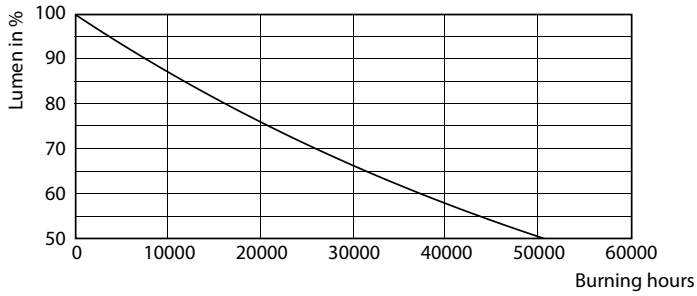

GU10 7.5-80W 650lm 2700K GU10 D 15khrs

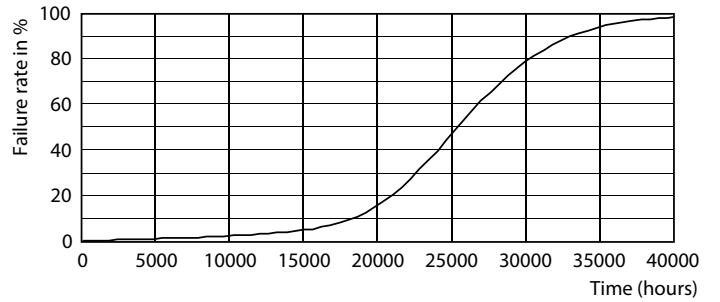

GU10 7.5-80W 650lm 2700K GU10 D 15khrs

## MASTER LEDspot MV Value

