



TL-D Standard Colours

TL-D 58W/33-640 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information		Voltage (Nom)	
Cap base	G13 [Medium Bi-Pin Fluorescent]	111 V	
Life to 10% failures (nom.)	10000 h	Controls and Dimming	
Life to 50% failures (nom.)	13000 h	Dimmable	Yes
Light Technical		Mechanical and Housing	
Colour Code	33-640	Bulb shape	T8 [26 mm (T8)]
Lamp Luminous Flux 25°C EL (Nom)	4600 lm	Approval and Application	
Colour Designation	Cool White (CW)	Mercury (Hg) content (nom.)	8.0 mg
Lumen maintenance 10,000 hours (nom.)	75 %	Energy consumption kWh/1,000 hours	68 kWh
Lumen maintenance 2,000 hours (nom.)	90 %	Product Data	
Lumen maintenance 5,000 hours (nom.)	80 %	Full product code	871150095049940
Colour Temperature, horizontal (Nom)	4100 K	Order product name	TL-D 58W/33-640 1SL/25
Colour Rendering Index,horiz (Nom)	63	EAN/UPC – product	8711500950499
Operating and Electrical		Order code	928049003312
Power (Rated) (Nom)	58.5 W	SAP numerator – quantity per pack	1
Lamp current (nom.)	0.670 A	Numerator – packs per outer box	25

TL-D Standard Colours

SAP material	928049003312
SAP net weight (piece)	167.000 g
ILCOS code	FD-58/41/2B-E-G13


Dimensional drawing

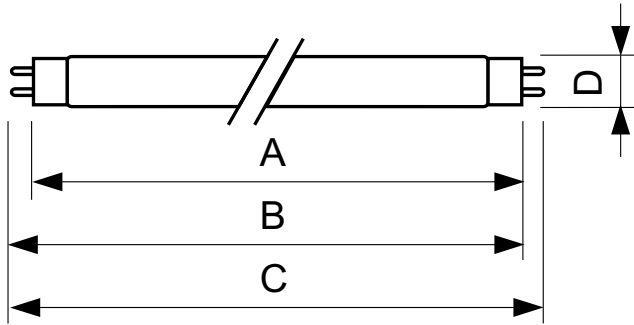

TL-D 58W/33-640 1SL/25

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 58W/33-640 1SL/25	28 mm	1500.0 mm	1507.1 mm	1504.7 mm	1514.2 mm


Photometric data

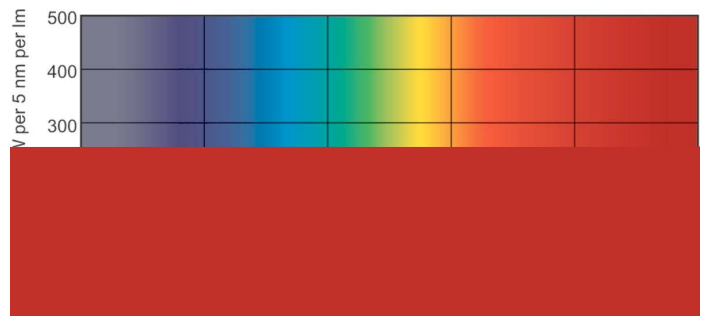


Lightcolour /33-640

Lightcolour /33-640

Lifetime

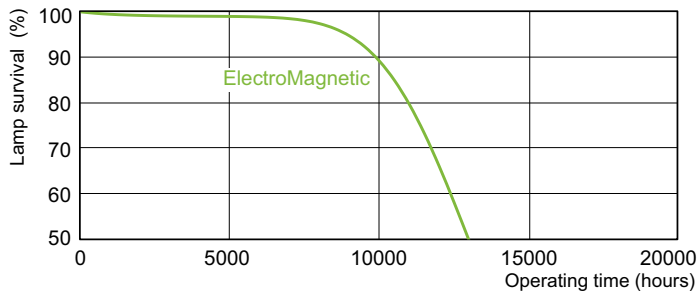


LDLE_TL-DSTD_0001-Life expectancy diagram

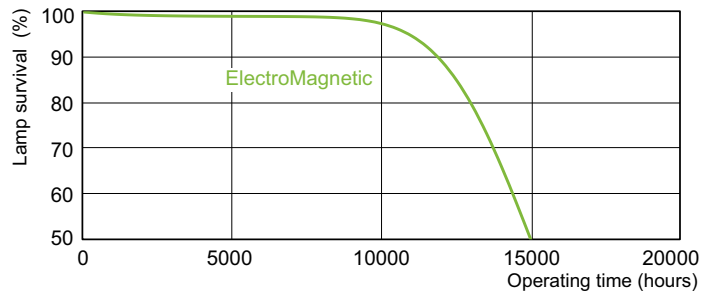

LDLE_TL-DSTD_0002-Life expectancy diagram

TL-D Standard Colours

Lifetime

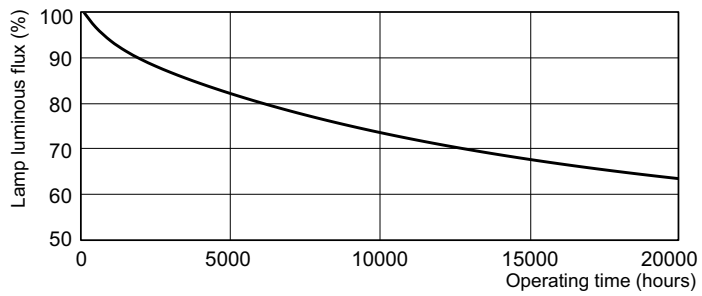

LDLM_TL-DSTD_0001-Lumen maintenance diagram

