



# Smartbright T8 Batten

## BN012C LED10/NW L600 G3

Polycarbonate

Whether for a new building or the renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new T8 LED batten range is a perfect replacement for traditional battens with fluorescent lamps. The process of selecting, installing and maintaining is so easy – it's a simple switch. The range offers customers various options; standalone battens, batten with individual switch and connectable battens in addition to 3 CCTs and 2 wattage options.

### Product data

General Information	
Lamp colour code	840 neutral white
Optical cover/lens type	Polycarbonate
Control interface	-
Protection class IEC	Safety class II (II)
Flammability mark	F [ For mounting on normally flammable surfaces]
CE mark	CE mark
Number of products on MCB (16 A type B)	10
Light source engine type	LED

Operating and Electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Inrush current	9 A
Power factor (min.)	0.9

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Housing material	Polycarbonate
Optical cover/lens material	Polycarbonate
Optical cover/lens finish	Opal
Overall length	574 mm
Overall width	28.4 mm
Overall height	35.7 mm
Effective projected area	0.016 m <sup>2</sup>
Colour	White

Approval and Application	
Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

# Smartbright T8 Batten

## Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>80
Initial chromaticity	0.3818, 0.3797, SDCM≤6
Initial input power	10 W
Power consumption tolerance	+/-10%

## Application Conditions


Ambient temperature range	-20 to +40 °C
---------------------------	---------------

## Product Data

Full product code	871951451782099
Order product name	BN012C LED10/NW L600 G3
EAN/UPC – product	8719514517820
Order code	911401808282
SAP numerator – quantity per pack	1
Numerator – packs per outer box	40
SAP material	911401808282
SAP net weight (piece)	0.151 kg



## Dimensional drawing

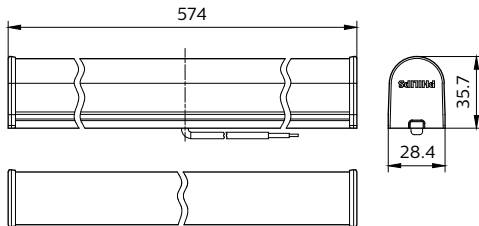

Batten LED

